Brimar INDUSTRIES

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Y3467 - 7 lb. PORTABLE SIGN STAND WITH 8 lb. 4' U-CHANNEL POST

Product Information

Aluminum Pedestal for Temporary or Permanent Sign Mounting
With a 6.85 lb. aluminum base and an 7.5 lb. u-channel post, this is SafetySign.com's lightest portable sign stand. It's manufactured specifically for those interested in a stand that is easy to move around their store, parking lot, or side walk.

Because of the lightweight nature of the base, this outdoor sign stand is best suited for smaller signs such as 12 x 18" but will accommodate signs up to a 36" square when customers use the mounting holes in the base to anchor it to concrete or asphalt surfaces. Anchoring is recommended for those planning on using signs larger than 12 x 18".

Please note that sign mounting hardware does not come with the stand. Y3465 (2-1/2" bolt set) is sold separately.

Portable sign stands ship in two different packages: one for the base and one for the sign post.

Can be mounted permanently to concrete or asphalt or can be used as a temporary base.

- Part Number: **Y3467**
- Cast aluminum base 15″ diameter
- Base can stand freely or it can be permanently mounted onto the ground (ground mounting hardware not included)
- Supplied with 4ft U-Channel post (2 lbs/ft)
- Kit ships in 2 separate packages
- Sign and sign mounting hardware sold separately
- Mount any sign with 2 - top and bottom - holes at ⅜″ diameter
- Sign mouting hardware Y3465
- Ground mounting anchors Y4949 or Y4988 or Y3557

Base Mounting Methods
- Most popular with U-Channel Sign Post (the nub fits only 2 lbs/ft posts)
- Works perfectly with Square Sign Posts. The nub fits both 1¾″ and 2″ posts.
- Compatible with 2⅜″ Round Sign Posts. For this combination to work, you must drill 2 holes in the round post, 2″ apart and at least ⅜″ in diameter.

Includes Post to Base Mounting Hardware

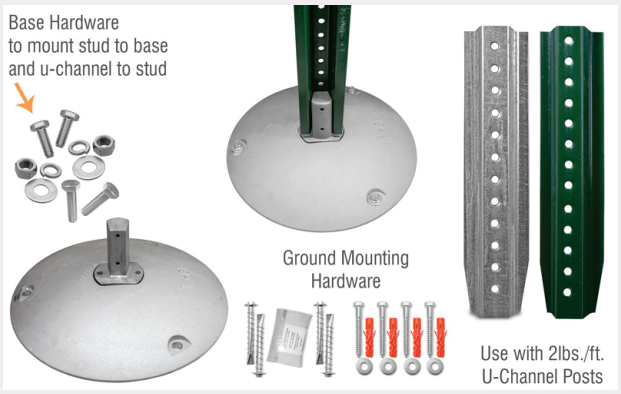

Description: 15in Aluminum Base with Stub & Hardware

Kit Design: Round base with three ground mounting holes, positioned 11" apart

Hardware contains:
- 2/ea. 3/8-16 x 1-1/2 Hex Head Bolt Gr.2, Zinc Plated
- 2/ea. 3/8-16 Finished Hex Nut Gr.2, Zinc Plated
- 2/ea. 3/8 USS Flat Washer, Zinc Plated
- 2/ea. 3/8 Medium Split Lock Washer, Zinc Plated
- 2/ea. 5/16-18 x 5/8 Hex Head Tap Bolt Gr.2, Zinc Plated

Brimar INDUSTRIES

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

U-CHANNEL POST 2 lbs/ft

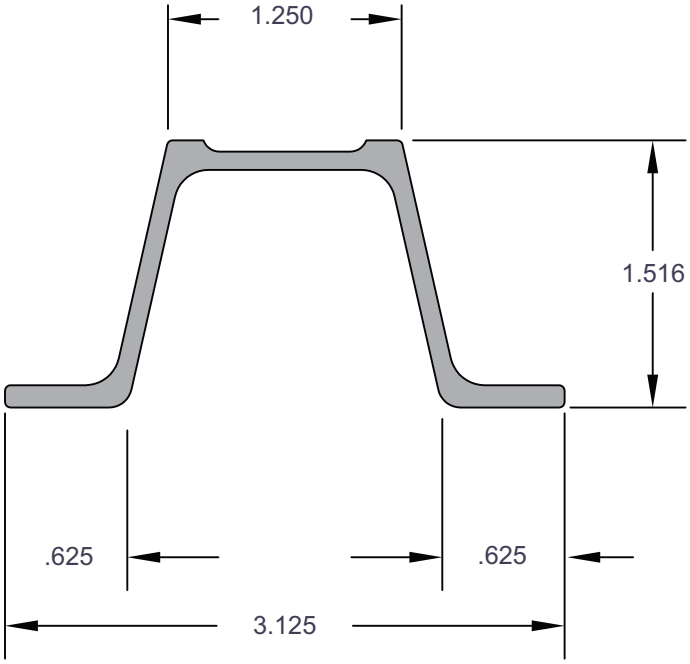

Material:
• Posts are produced from standard “T” rails weighing 91 lbs/yd or more according to ASTM A499-89, Grade 60.

Finish:
Sign posts are finished with baked enamel green paint and galvanized per ASTM A123.

Sign Post:
• The weight of each sign post before punching is 2.00 lbs/ft.
• The sign post is punched with .375” diameter holes on 1.0” centers, full length.
• The first hole and last hole are 1.0” from the end of post.

We hereby certify that all U-channel posts sold by Brimar Industries, Inc are hot rolled, fabricated in the USA and have been produced from recycled Standard T rails weighing 91 lb / yard or heavier, complying with ASTM specification A499-89, Grade 60. Standard T rails used for products subject to “Buy America” requirements were produced according to ASTM A1 from rails melted and rolled in the United States of America.

The galvanizing applied to these posts meets all standards of the American Society for Testing Materials specifications, designated as ASTM A123.

Zinc complying with ASTM B-6 (Prime Western Grade) was used throughout the operations period, as required by ASTM A123.
Regular coating thickness tests were conducted on these products. The minimum average thickness was 3.3 mils.

DATE: ____ / ____ / ____ **JOB:** _____

CONTRACTOR: _____