Brimar

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

2-3/8” Round Post Breakaway Coupler

Made of cast gray iron, withstands winds of 120 mph.

Brimar’s Part #: Y3555
Color: Rust-resistant Galvanized
Diameter: 2-3/8”
Gauge: 8 to 16 gauge
Foundation: Soil
Weight: 5.5 lbs.

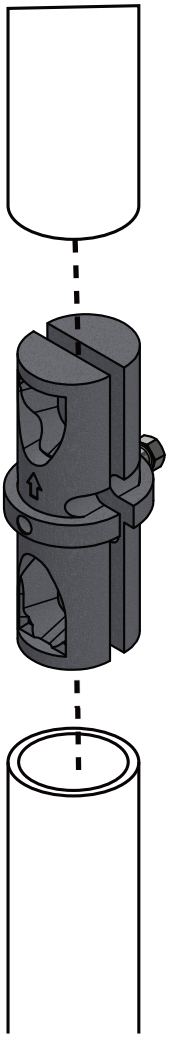

Brimar’s Part Number:
3 ft = Y3556
Color: Rust-resistant Galvanized
Diameter: 2-3/8”
Gauge: 12 gauge
Material: Tubular Steel
Wall Thickness: 0.109”
Type: Anchor Post
Sizes: 3 ft. Anchor,
Weight: 3 ft = 8.15 lbs.

Bolt has a 9/16” hex head x & is 2-1/4” in length. Zinc plated - Grade 5 medium carbon steel.

SNAP’n SAFE round Sign Post Breakaway is an NCHRP 350 compliant breakaway sign post system that is designed with a 360° shear point that will prevent the sign post from striking and penetrating the windshield or roof of a vehicle when impacted during a collision. It also helps save money on repairs by saving the anchor post and requiring less labor for repairs. This breakaway round post system is available for 2-3/8" sign posts.

DATE: ____/____/____ **JOB:** _____

CONTRACTOR: _____

INSTALLATION INSTRUCTIONS - GROUND MOUNT

1. Remove any burrs or imperfections from the inside of the sign post [A] & the anchor post [B].

Note: S238R8 is used with a 2-3/8" o.d., 8-12ga sign post & anchor post.

2. Determine the location for the anchor post.

3. Drive the anchor post into the ground so only 3" to 4" remain above ground level.

<u>The anchor post must be straight & level at completion of installation.</u>

4. Position the arrow on the SNS coupler [C] upward then insert it into the anchor post.

5. Slide the sign post over the top half of the SNS coupler and properly align orientation.

6. Using a wrench, tighten the hex head screw [D] into the sns coupler until secure.

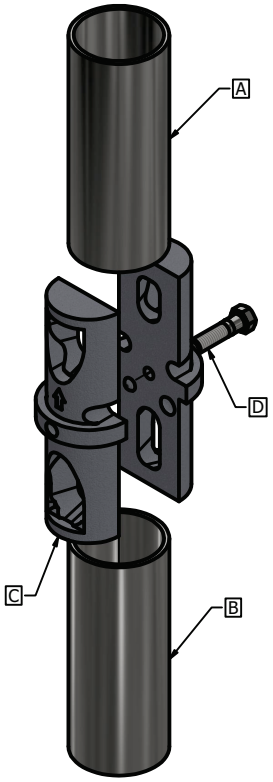
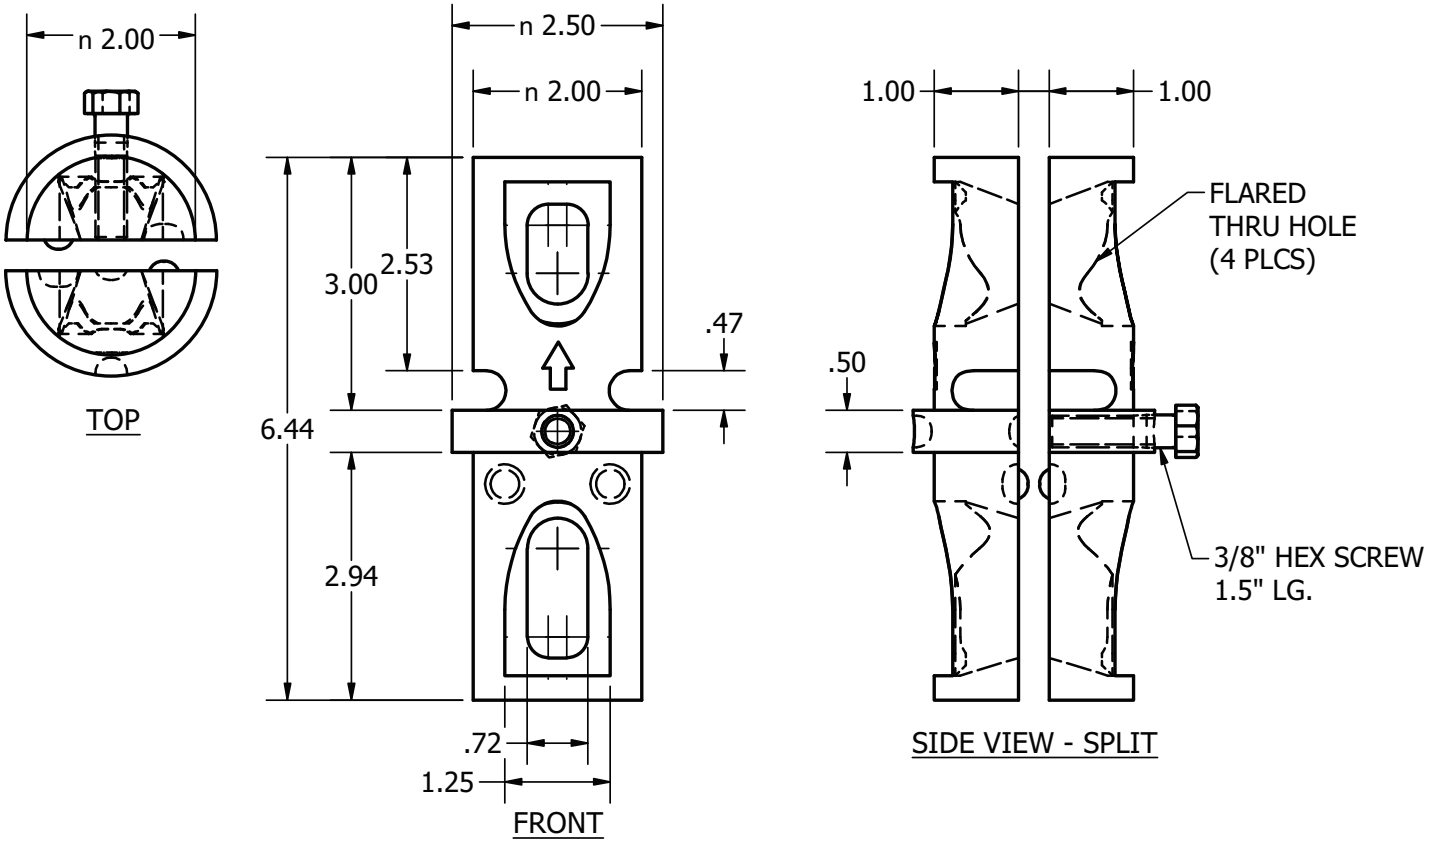
SPECIFICATIONS